

KROMA TELECOM



5" LCD-TFT MONITORS – LM6005

LM6005 is provided with 3 high resolution and high brightness 5" TFT-LCD screen. It is designed for the most demanding broadcast applications. Lightweight and with a very low power consumption, it is ideal for compact spaces such as OB vehicles & control rooms, and for all those situations in which it is necessary to control many different sources in the minimum possible space.


The high resolution of the screens (960 x 234 pixels), full colour, excellent viewing angle and its tilting front panel, give the best all-round image. Its control by microprocessor allows a fast and easy access to all its adjustments and main functions. Functional parameters of one, two or all together screens (video inputs selection, brightness, contrast, saturation, dimmer) can be modified by the user. On the front panel there is a double-colour tally led per screen.

Minimum Lamp Life Time is 30.000 Hours, the longest of the market. The external power supply uses a special connector in order to avoid accidental disconnections.

This equipment can be controlled remotely.

LM6005A11: 2 PAL/NTSC (UIT R-BT 470 / SMPTE 170 M) y 2 SDI (UIT R-BT601) video inputs per screen.

LM6005A12: 2 PAL/NTSC (UIT R-BT 470 / SMPTE 170 M) video inputs per screen.

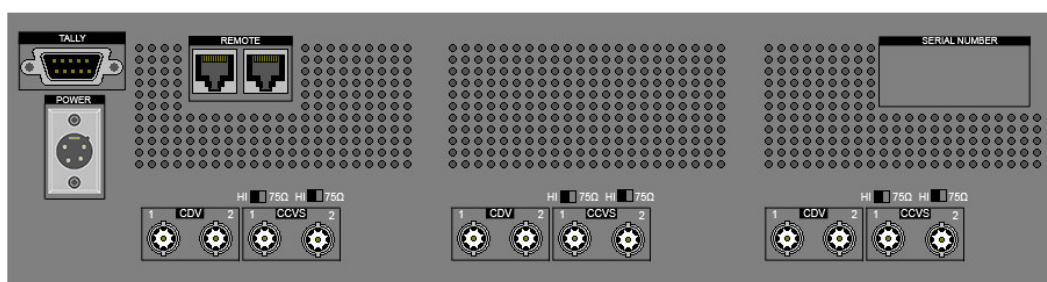

Dimensions (mm)	Weight	Watts	Resolution	Dot Pitch	Viewing angle	Pixel	Active Area	MTTF	Contrast Brightness	Remote Control
126mm (3U High) 440mm (19" Rack) 70mm (Deep)	2,5 Kg Approx	28 W	960 x 234	0.107 H 0.319 V	± 60° H + 20° - 40° V	Stripe	103 x 74,5 mm	30.000 Hours	150:1 400 cd/m2	YES (RS-485)

Specs can be modified without prior notice

KROMA TELECOM

La Granja 80 Pol Ind Alcobendas - 28108 Madrid – Spain

Tel +34. 91.661.4514 Fax +34.91.661.5875 Email : sales@kromatelecom.es Web: www.kromatelecom.es